

Advancement through Innovation

# Shallow Borehole EpiSensor

Model SBEPI is a *cost effective* triaxial downhole package useful for relatively shallow borehole installations. The unit consists of three EpiSensor force balance accelerometer modules mounted orthogonally in one small convenient package. The diameter of the SBEPI is only 2.625", making it suitable for installation in a 3" diameter hole.

With full-scale recording ranges of  $\pm 0.25$  to  $\pm 4g$ , the SBEPI provides on-scale recording of earthquake motions even at near-fault locations.

The significant bandwidth of DC to 200 Hz allows engineers and scientists to study motions at higher frequencies while maintaining the very important DC response that allows simple field calibration and reduces post-processing confusion.

Output circuitry is also significantly enhanced. Four types of outputs can be selected by the user:  $\pm 2.5V$  single-ended,  $\pm 10V$  single-ended,  $\pm 5V$  differential or  $\pm 20V$  differential. The  $\pm 2.5V$  single-ended output is appropriate for use with traditional Kinemetrix earthquake recording instruments. The  $\pm 10V$  single-ended output and  $\pm 20V$  differential output are well suited for use with a wide range of digital recorders currently on the market.

EpiSensor force balance accelerometers also available in the HypoSensor deep borehole package, Model FBA ES-DH.

## SHALLOW BOREHOLE




## FEATURES

- Extended bandwidth – DC to 200 Hz
- Low noise
- Fits in 3" diameter borehole
- Factory-selectable full-scale range
- Calibration coil (standard)
- Double-stage transient protection
- Single-end or differential output (user selectable)

### Options

- Single 12Vdc supply
- 110-meter cable (in place of the 40 m cable)
- Wellhead junction box, P/N 108390-04-PL

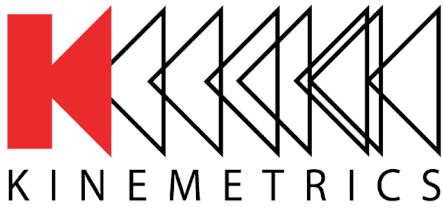

Advancement through Innovation

# SHALLOW BOREHOLE

SHALLOW BOREHOLE



## SPECIFICATIONS

<b>Dynamic range:</b>	155 dB+
<b>Bandwidth:</b>	DC to 200 Hz
<b>Calibration coil:</b>	Standard
<b>Full-scale range:</b>	Factory-selectable at $\pm 0.25g$ , $\pm 0.5g$ , $\pm 1g$ , $\pm 2g$ or $\pm 4g$
<b>Outputs:</b>	User selectable at: $\pm 2.5V$ single-ended $\pm 10V$ single-ended $\pm 5V$ differential $\pm 20V$ differential
<b>Linearity:</b>	$< 1000 \mu g/g^2$
<b>Hysteresis:</b>	$< 0.1\%$ of full scale
<b>Cross-axis sensitivity:</b>	$< 1\%$ (including misalignment)
<b>Zero point thermal drift:</b>	$< 500 \mu g/^\circ C$ (1g sensor)
<b>Power consumption:</b>	100mA from Single 12VDC power supply 35mA from +/- 12VDC power supply
<b>Operating Temperature:</b>	$-20^\circ$ to $70^\circ C$ ( $0^\circ$ to $160^\circ F$ )
<b>Housing:</b>	67 mm diameter x 300 mm (2.625" x 12" stainless steel) Provided with attached 40 m cable 110 meter cable is optional Watertight to 140 psi
<b>Weight:</b>	2.3 kg (5 lbs) (85 lbs. with 40 m cable in shipping container)
<b>Ordering Information:</b>	Specify: Full-scale range, outputs, noise (standard or low) and options, if any